

# Vision Plus

High efficiency  
combi boilers




- VISION PLUS COMBI 25C - 40C ■
- ErP CLASS A ■
- 7 YEAR WARRANTY ■
- EMBEDDED 7 DAY DIGITAL CLOCK ■
- BUILT-IN FILLING LOOP ■
- UNIVERSAL PIPE LAYOUT ■
- CLICK FIT FLUE ■
- CONVERTS TO LPG ■

# Vision Plus

## High efficiency combi boilers

### Dimensions and Clearances (mm)

\*From casing or 25mm above flue elbow (whichever is applicable)  
†Models 25C & 30C  
‡Models 35C & 40C

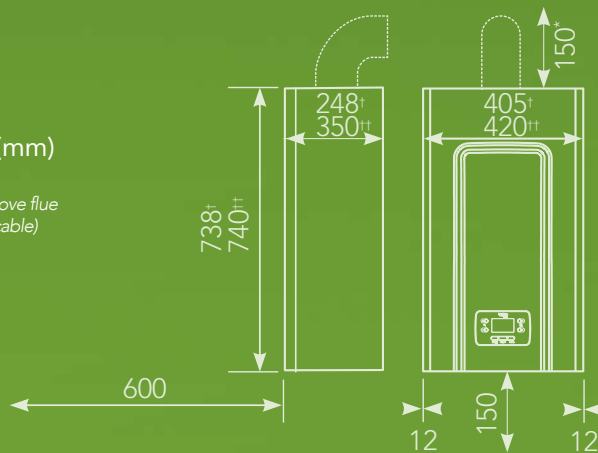

- Fully compliant with the Energy-related Products Directive. Further efficiency can be achieved when installed with a weather compensation sensor or OpenTherm control such as BeSMART.<sup>(1)</sup>
- 7 year parts and labour warranty.<sup>(2)</sup>
- Simple to use embedded 7 day digital clock with three modes of operation and back-lit LCD display enables full control of heating times over the week, maximising control and saving energy. The clock can be disabled should an alternative control be required.
- Flow rate of up to 16.4 l/min (Vision Plus 40C) results in quick delivery of domestic hot water.
- A wide modulation ratio of 1:8 (Vision Plus 35C & 40 C) ensures boiler cycling is reduced, even when the central heating load is minimal.
- A new radial stainless steel heat exchanger (Vision Plus 35C & 40 C) enables front servicing and reduced installation clearances.
- Lightweight, at only 27kg (Vision Plus 25C), allow for the boiler to be lifted into place easily, even in tight spaces.
- Compact dimensions (Vision Plus 25C & 30C) enable the boiler to be sited almost anywhere in the home, including within a kitchen cupboard.
- Click fit flue connection for quick and easy installation of the flue system. Flueing options available are; horizontal, vertical and twin flue.
- Rear flue option (Vision Plus 25C & 30C) as well as the standard top flue option provides a versatile installation.
- Designed for easy installation. Universal pipework layout (FOGIR) enables trouble-free replacement of other brands of boiler.
- Standard Autostop disabling function<sup>(3)</sup> that automatically changes the current operating mode and moves it permanently into the standby mode, helping Registered Social Landlords fulfill their legal obligation of an annual gas safety check.
- Simple commissioning; only minimal adjustments are required after installation and automatic modulation eliminates the need to range rate the boiler.

<sup>(1)</sup>The addition of an energy saving control will override the built-in digital control settings on the Vision Plus combi.  
<sup>(2)</sup>Subject to registration and annual service.  
<sup>(3)</sup>Autostop activation device required.

ErP Compliant	7 Year Warranty	OpenTherm Inside	7 Day Time Clock	Built-in Filling Loop	Universal Pipe Layout	Click Fit Flue	Converts to LPG
<b>Vision Plus 25C &amp; 30C</b>				<b>Vision Plus 35C &amp; 40C</b>			
Lightweight & Compact	Cupboard Fit	Rear Flue	1:8 modulation	High DHW Flow Rates	Radial Heat Exchanger		

SPECIFICATIONS	VISION PLUS 25C	VISION PLUS 30C	VISION PLUS 35C	VISION PLUS 40C
PRODUCT ORDER CODE	20173520	20173521	20174724	20174725
CENTRAL HEATING				
HEAT INPUT (kW)	20	25	30	35
MAXIMUM HEAT OUTPUT 60/80°C (kW)	19.5	24.4	29.2	29.2
MAXIMUM HEAT OUTPUT 30/50°C (kW)	20.8	26.2	32.3	32.3
DOMESTIC HOT WATER				
HEAT INPUT (kW)	25	31.6	34.6	40
FLOW RATE - 35°C RISE (L/MIN)	10.2	12.9	14.2	16.4
DIMENSIONS				
HEIGHT X WIDTH X DEPTH (MM)	738 x 405 x 248		740 x 420 x 350	
WEIGHT				
DRY WEIGHT (KG)	27	29	37	37
CONNECTIONS				
FLOW & RETURN	22MM			
GAS	22MM			
DHW INLET & OUTLET	15MM			
SAFETY VALVE	15MM			
ELECTRICAL				
VOLTAGE (V/Hz)	230/50			
FLUE DETAILS (CONCENTRIC)				
MAXIMUM HORIZONTAL FLUE LENGTH 60/100MM	5.85M	4.85M	6M	6M
MAXIMUM VERTICAL FLUE LENGTH 60/100MM	6.85M	5.85M	7M	7M
MAXIMUM HORIZONTAL FLUE LENGTH 80/125MM	15M	12M	15M	15M
MAXIMUM VERTICAL FLUE LENGTH 80/125MM	15M	12M	15M	15M
FLUE DETAILS (TWIN)				
MAX HORIZONTAL / VERTICAL FLUE LENGTH (80MM/80MM)	30M/30M	25M/25M	25M/25M	25M/25M
EFFICIENCY				
ErP SEASONAL SPACE HEATING ENERGY EFFICIENCY (CLASS/%)	A/93	A/93	A/92	A/92
ErP WATER HEATING EFFICIENCY (XL PROFILE) (CLASS/%)	A/85	A/84	A/88	A/86
SAP 2009 EFFICIENCY (%)	89.1	89.0	88.7	88.5
NOX CLASS	6	6	6	6

ACCESSORIES	
DESCRIPTION	CODE
STANDARD HORIZONTAL FLUE TERMINAL	20122759
TELESCOPIC HORIZONTAL FLUE TERMINAL	20122761
VERTICAL FLUE TERMINAL	20122763
REAR FLUE TERMINAL	20132064
STANDARD BeSMART WI-FI KIT	20111860
7 DAY RF ROOM THERMOSTAT CONTROL	20101743
OUTSIDE WEATHER COMPENSATION SENSOR	1220559
SPACING FRAME	20030704
MAGNETIC FILTER	29450199
PRE FIXING JIG	20177531
CONDENSATE PUMP	404
LPG CONVERSION KITS	20082917
	20113110
	20080711

GET IN TOUCH

Vokera Limited, Borderlake House, Unit 7 Riverside Industrial Estate, London Colney, AL2 1HG

**E:** sales@vokera.co.uk

**Sales:** 01727 744000

**Technical:** 01727 744028

**W:** www.vokera.co.uk

**Fax:** 0844 391 0998

**Service:** 01274 866100

### WE ARE SOCIAL

